
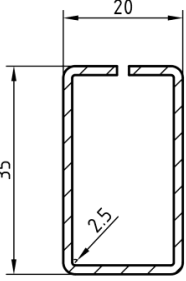
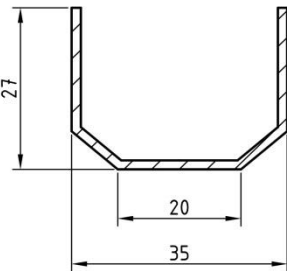

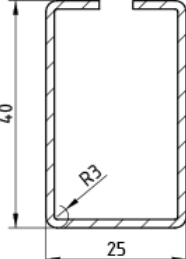


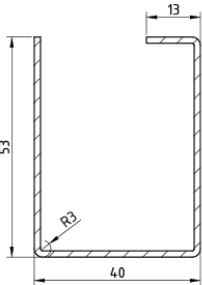

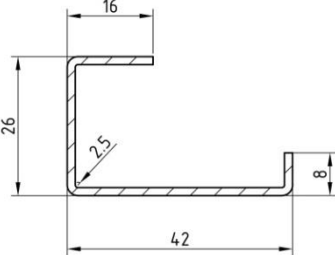
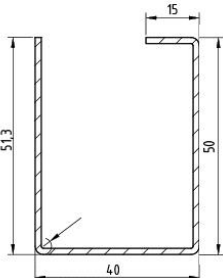
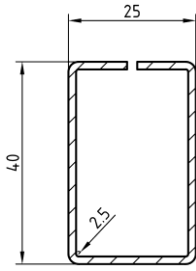
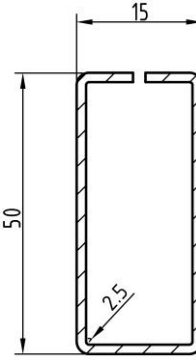
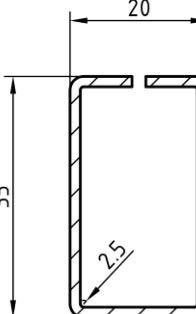
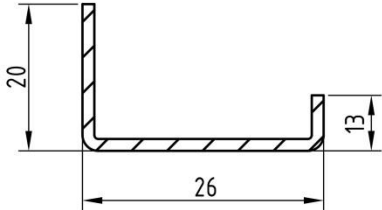
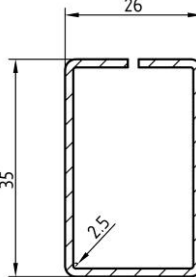
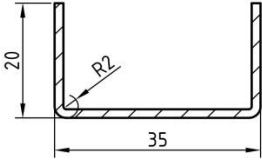
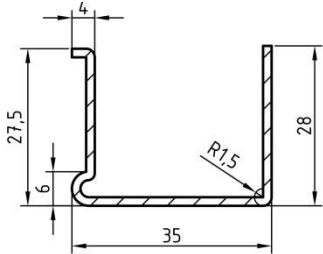
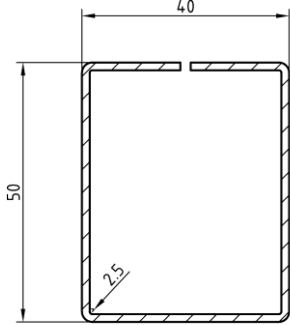
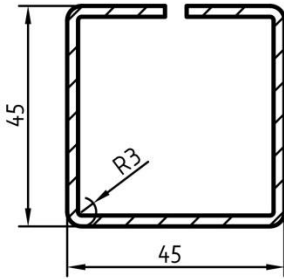
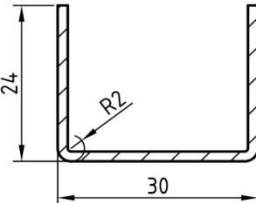
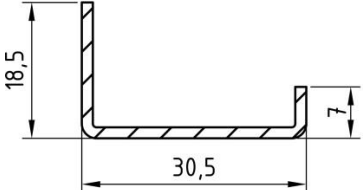


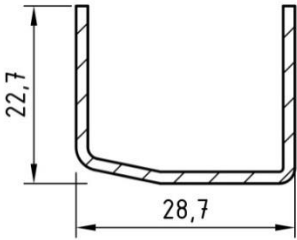
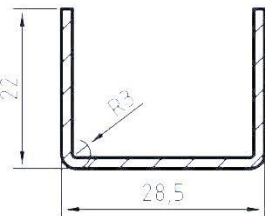

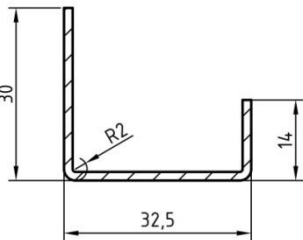


Galvanized steel reinforcement sections for the PVC-u window and door
TU BY 692 127 934.001–2019

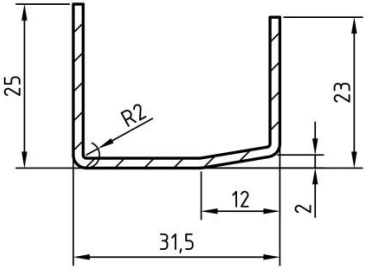
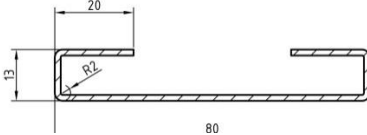
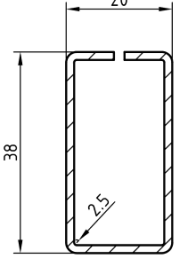

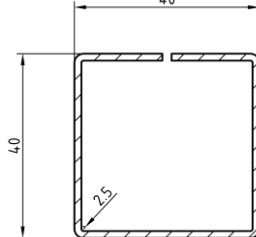
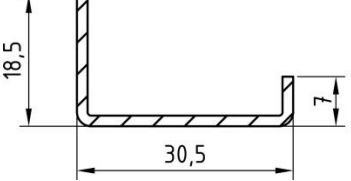
| No | Drawing | Type | Analogue |
|----|---|-------|-----------------|
| 1 |  | 30x30 | ALUPLAST 229001 |
| 2 |  | 20x35 | ALUPLAST 229101 |
| 3 |  | 35x27 | ALUPLAST 229023 |
| 4 |  | 20x25 | ARtec S 15-15 |
| 5 |  | 25x40 | ARtec S 21 |

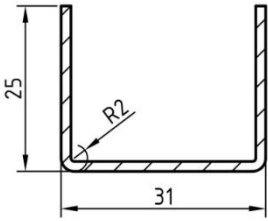
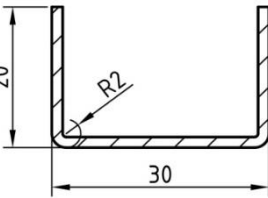
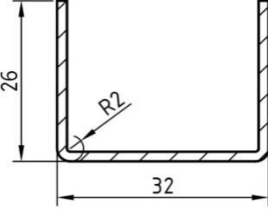
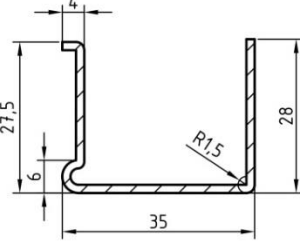
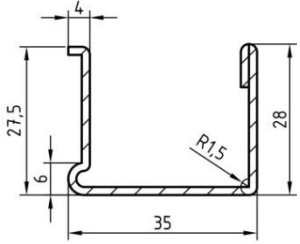
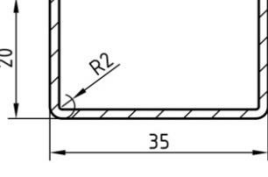
| | | | |
|----|---|------------|-----------------|
| 6 |  | 20x30 | ARtec S 3-15 |
| 7 |  | 10x40 | ARtec S 20 |
| 8 |  | 53x40x13 | ARtec S 66 |
| 9 |  | 30x26 | ARtec - S12 |
| 10 |  | 42x26 | BRUGMANN VS-102 |
| 11 |  | 40x51,3x50 | Brugmann VS-103 |

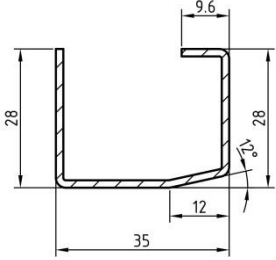



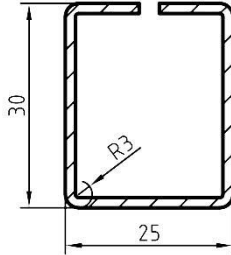
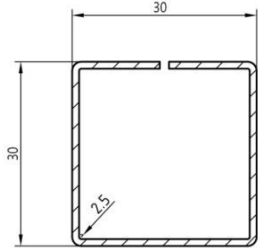
| | | | |
|----|--|----------|-----------------|
| 12 |  <p>Technical drawing of a rectangular profile. The width is 25 and the height is 40. The bottom-left corner is chamfered with a 2.5mm angle.</p> | 25x40 | BRUGMANN VS-302 |
| 13 |  <p>Technical drawing of a rectangular profile. The width is 15 and the height is 50. The bottom-left corner is chamfered with a 2.5mm angle.</p> | 15x50 | Brusbox |
| 14 |  <p>Technical drawing of a rectangular profile. The width is 20 and the height is 35. The bottom-left corner is chamfered with a 2.5mm angle.</p> | 20x35 | Brusbox |
| 15 |  <p>Technical drawing of an L-shaped profile. The vertical leg has a height of 20, the horizontal leg has a width of 26, and the thickness of the horizontal leg is 13.</p> | 26x20x13 | Brusbox |
| 16 |  <p>Technical drawing of a rectangular profile. The width is 26 and the height is 35. The bottom-left corner is chamfered with a 2.5mm angle.</p> | 26x35 | Brusbox |

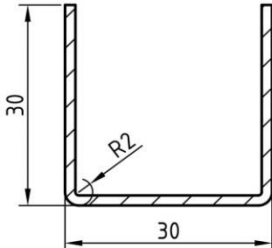
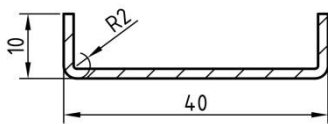
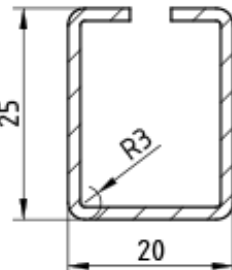
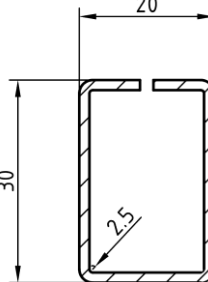
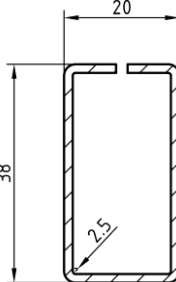
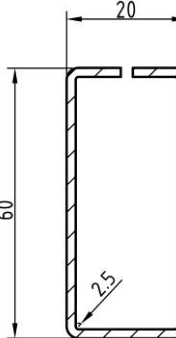
| | | | |
|----|--|-----------|---------|
| 17 |  <p>Technical drawing of a U-shaped profile. The overall width is 35 and the height is 20. The corners are rounded with a radius of R2.</p> | 35x20 | Brusbox |
| 18 |  <p>Technical drawing of a U-shaped profile. The overall width is 35 and the height is 28. The corners are rounded with a radius of R15. There is a 6mm offset on the left side and a 4mm offset on the top side.</p> | 35x28 | Brusbox |
| 19 |  <p>Technical drawing of a square profile. The overall width is 40 and the height is 50. The corners are rounded with a radius of R25.</p> | 40x50 | Brusbox |
| 20 |  <p>Technical drawing of a square profile. The overall width is 45 and the height is 45. The corners are rounded with a radius of R3.</p> | 45x45 | Brusbox |
| 21 |  <p>Technical drawing of a U-shaped profile. The overall width is 30 and the height is 24. The corners are rounded with a radius of R2.</p> | 30x24 | DEXEN |
| 22 |  <p>Technical drawing of a U-shaped profile. The overall width is 30,5 and the height is 18,5. There is a 7mm offset on the right side.</p> | 30,5x18x7 | DEXEN |

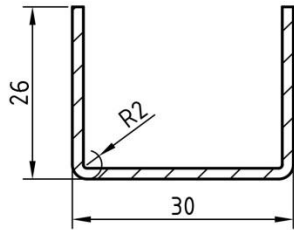
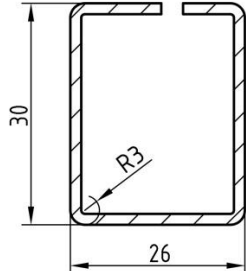
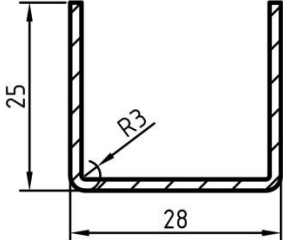


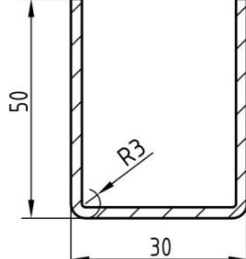
| | | | |
|----|--|--------------|----------------|
| 23 |  <p>Technical drawing of a U-shaped profile. The vertical height is 22,7 and the horizontal width is 28,7. The profile has a rounded bottom corner.</p> | 28,7x22,7 | Gealan 3705 |
| 24 |  <p>Technical drawing of a U-shaped profile. The vertical height is 22 and the horizontal width is 28,5. The profile has a rounded bottom corner with a radius of R3.</p> | 28,5x22 | Gealan 879 251 |
| 25 |  <p>Technical drawing of a U-shaped profile. The vertical height is 28 and the horizontal width is 28. The profile has a rounded bottom corner with a radius of R3.</p> | 28x28 | Gealan 871 551 |
| 26 |  <p>Technical drawing of a U-shaped profile. The vertical height is 30, the horizontal width is 32,5, and the thickness of the vertical leg is 14. The profile has a rounded bottom corner with a radius of R2.</p> | 14x32,5x30,5 | KBE-200 |
| 27 |  <p>Technical drawing of a square profile. The outer dimensions are 31 by 32. The inner dimensions are 12,5 by 6. The profile has a rounded corner with a radius of R1,5.</p> | 31x32 | KBE-201 |
| 28 |  <p>Technical drawing of a rectangular profile. The horizontal width is 20 and the vertical height is 30. The profile has a rounded corner with a radius of R2,5.</p> | 20x30 | KBE-203 |

| | | | |
|----|---|------------|---------|
| 29 |  | 31,5x25x23 | KBE-207 |
| 30 |  | 80x13x15 | KBE-208 |
| 31 |  | 20x38 | KBE-604 |
| 32 |  | 40x50 | KBE 614 |
| 33 |  | 40x40 | KBE 655 |
| 34 |  | 31,5x18x7 | LIDER |

| | | | |
|----|---|------------|------------------|
| 35 |  | 31x25 | Montblanc |
| 36 |  | 30x20 | Montblanc Logick |
| 37 |  | 32x26 | Montblanc |
| 38 |  | 35x28x27,5 | Rehau 506 |
| 39 |  | 35x28x27,5 | Rehau 506 |
| 40 |  | 35x20 | Rehau 245536 |

| | | | |
|----|---|----------|-------------------|
| 41 |  | 35x28x28 | Salamander 455210 |
| 42 |  | 20x45 | Salamander 215120 |
| 43 |  | 30x28 | Salamander 215025 |
| 44 |  | 25x28 | VEKA 113.060 |
| 45 |  | 25x30 | VEKA 113.002 |
| 46 |  | 30x30 | VEKA 113.025 |

| | | | |
|----|---|-------|---------------|
| 47 |  <p>Technical drawing of an L-shaped profile. The vertical leg has a height of 30, and the horizontal leg has a width of 30. The inner corner is rounded with a radius of R2.</p> | 30x30 | VEKA 113.3655 |
| 48 |  <p>Technical drawing of an L-shaped profile. The vertical leg has a height of 10, and the horizontal leg has a width of 40. The inner corner is rounded with a radius of R2.</p> | 40x10 | Veka 113.028 |
| 49 |  <p>Technical drawing of a U-shaped profile. The vertical leg has a height of 25, and the horizontal leg has a width of 20. The inner corner is rounded with a radius of R3.</p> | 20x25 | WINTECH |
| 50 |  <p>Technical drawing of a U-shaped profile. The vertical leg has a height of 30, and the horizontal leg has a width of 20. The inner corner is rounded with a radius of R2.5.</p> | 20x30 | WINTECH |
| 51 |  <p>Technical drawing of a U-shaped profile. The vertical leg has a height of 38, and the horizontal leg has a width of 20. The inner corner is rounded with a radius of R2.5.</p> | 20x38 | WINTECH |
| 52 |  <p>Technical drawing of a U-shaped profile. The vertical leg has a height of 60, and the horizontal leg has a width of 20. The inner corner is rounded with a radius of R2.5.</p> | 20x60 | WINTECH |

| | | | |
|----|---|-------|---------|
| 53 |  | 30x26 | WİNTECH |
| 54 |  | 26x30 | WİNTECH |
| 55 |  | 28x25 | WİNTECH |
| 56 |  | 28x34 | WİNTECH |
| 57 |  | 30x29 | WİNTECH |
| 58 |  | 30x50 | WİNTECH |

GALVANIZED STEEL REINFORCEMENT FOR UPVC WINDOWS

We are company BildFix, LLC — a producer of galvanized steel reinforcement for uPVC window. We have a modern machine park and a wide range of tools to design, develop and produce different reinforcements profiles in an extremely short time.

Range of products:

- Window reinforcements for different systems: Aluplast, Brüggmann, Gealan, KBE, Rehau, Salamander, Veka and many others
- Steel Thickness 1.0 — 2.5 mm
- Steel Grade DX51D / DX52D / S250GD / S350GD
- Zinc thickness 100 / 140 / 275/ 350 g/m²
- Box, channel and angle sections in various sizes
- Profile length standard 6000 mm or according to customer requirement

Standards

- DIN EN 10 162. Cold-rolled steel sections — Technical delivery conditions. Dimensional and cross-sectional tolerances
- DIN EN 10 346–2015. Continuously hot-dip coated steel flat products for cold forming. Technical delivery conditions

Our advantages

- Modern equipment and comprehensive in-house tool room
- ISO 9001:2015
- Galvanized steel from leading Russian steel producers NLMK, SEVERSTAL, MMK
- All production is according to the highest European standards
- Manufacturing of products in the shortest possible time
- A wide range of standard rebar profiles are available in stock and on request
- Delivery from Minsk (Belarus) to the buyer at the exactly agreed time

BildFix, LLC

**Republic of Belarus, Minsk Region, Minsk District, Kolodischanskiy Village Soviet, 162,
room 20, Area Agrogorodok Kolodischi**

Tel. +375 17 517 6 999 Mob +375 29 638 21 18

E-mail info@bildfix.by Web <https://bildfix.by>